


QuPanel 5G/LTE Global MIMO 4x4 Nf

Directional ultra wideband 5G/LTE MIMO 4x4 antenna with integrated Nf connectors

QuPanel **5G**/LTE Nf directional MIMO 4x4 is ultra wideband 5G outdoor antenna. It's primary designed for LTE/5G/3G/2G devices which require high efficiency connections. The antenna covers many LTE bands including the new Extended LTE **Band 71** and frequencies: **600 - 6000MHz**. The mounting bracket allows the antenna to be installed on the pole or on the wall, as the client antenna to receive Internet by LTE/5G/3G/2G. It's ideal solution to use with all industrial and domestic MIMO 4x4 5G modems and routers. Integrated Nf connectors.



WIDE BAND 600-6000MHZ, 5G TECHNOLOGY



FIBREGLASS, WALL OR POLE MOUNTING BRACKET



FOUR NF CONNECTORS




80° BEAMWIDTH



7DBI GAIN



MADE IN EUROPE

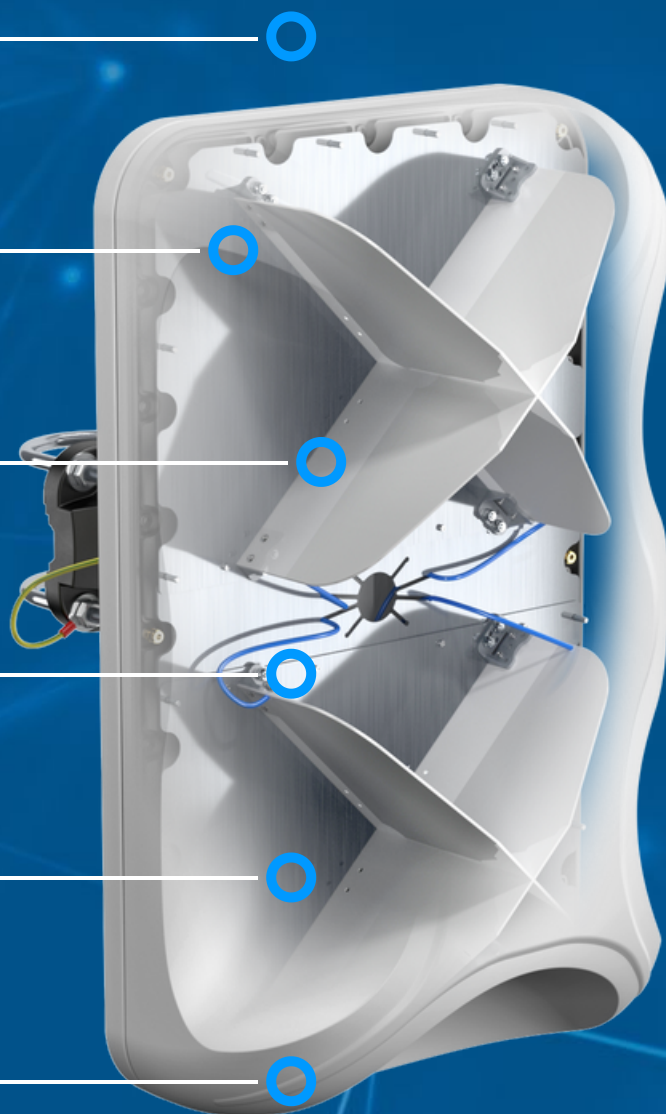

5G / LTE ANTENNA SPECIFICATION


FREQUENCY	617 - 960 MHz 1.7 - 2.7 GHz 3.3 - 4.6 GHz 4.7 - 6.0 GHz
GAIN	617 - 960 MHz : 6 dBi 1.7 - 2.7 GHz : 7 dBi 3.3 - 4.6 GHz : 7 dBi 4.7 - 6.0 GHz : 5.5dBi
SUPPORTED LTE BANDS	1, 2, 3, 4, 5, 7, 8, 9, 10, 12, 13, 14, 17, 18, 19, 20, 22, 25, 26, 27, 28, 29, 30, 33, 34, 35, 36, 37, 38, 39, 40, 41, 42, 43, 44, 46, 47, 48, 49, 52, 53, 65, 66, 67, 68, 69, 71, 85, 103, 106
SUPPORTED 5G BANDS	n1, n2, n3, n5, n7, n8, n12, n13, n14, n18, n20, n25, n26, n28, n29, n30, n34, n38, n39, n40, n41, n46, n47, n48, n53, n65, n66, n67, n71, n77, n78, n79, n80, n81, n82, n83, n84, n85, n86, n89, n90, n95, n97, n98, n100, n101, n256
VSWR	<2.00, max <3.00
BEAMWIDTH	80°/80° ±15°
POLARIZATION	X (±45degrees)
IMPEDANCE	50 Ω

MECHANICAL SPECIFICATION

MATERIALS	ABS, aluminum, PTFE, fiberglass
CONNECTOR TYPE	Nf
INGRESS PROTECTION	IP67
DIMENSIONS	486.0 x 292.2 x 105.6 mm 19.13 x 11.50 x 4.16 inch
WEIGHT	2.8 kg 6.17 lbs
OPERATING TEMPERATURE	From -40°C to 80°C From -40°F to 176°F

FREQUENCY BANDS

LTE / 4G	1	2	3	4	5	7	8	617 MHz	6000 MHz
	9	10	12	13	14	17	18		
	19	20	22	25	26	27	28		
	29	30	33	34	35	36	37		
	38	39	40	41	42	43	44		
	46	47	48	49	52	53	65		
	66	67	68	69	71	85	103		
	106								



	n1	n2	n3	n5	n7	n8	n12	
	n13	n14	n18	n20	n25	n26	n28	
	n29	n30	n34	n38	n39	n40	n41	
617 MHz	n46	n47	n48	n53	n65	n66	n67	6000 MHz
	n71	n77	n78	n79	n80	n81	n82	
	n83	n84	n85	n86	n89	n90	n95	
	n97	n98	n100	n101	n256			

COMPATIBLE ROUTERS


VARIANT: AP5G4-GN

TELTONIKA	RUTX12, RUTX14, RUTX50, TRB500
DIGI	TX54 LTE-Advanced
ROBUSTEL	EG5120, R2000, R5020, R5020 Lite
COMSET	CM770W-6
CRADLEPOINT	IBR1700, R1900
DIGI	TX54 LTE-Advanced
EE 5G (5GEE)	Smart 5G Hub
FORTINET	FEX-311F
PEPLINK	BR1 Pro (CAT-20), MAX HD2, MAX HD2 Mini, MAX Transit, MAX Transit Duo Pro, UBR Plus


QUECTEL	5G RM500Q-AE, 5G RM500Q-GL, 5G RM502Q-GL, 5G RM505Q-AE, 5G RM510Q-GL, 5G RM520N-EU, 5G RM520N-GL, 5G RM521F-GL, 5G RM530N-GL, LTE-A EM160R-GL
ROBUSTEL	EG5120, R2000, R5020, R5020 Lite
SIEMENS	6GK5853-2EA00-2DA1, 6GK5856-2EA00-3AA1, 6GK5856-2EA00-3DA1
TELTONIKA	RUTX12, RUTX14, RUTX50, TRB500
ZYXEL	Nebula FWA510, NR5103
OTHER	4 * SMA

PLOTS



VSWR 

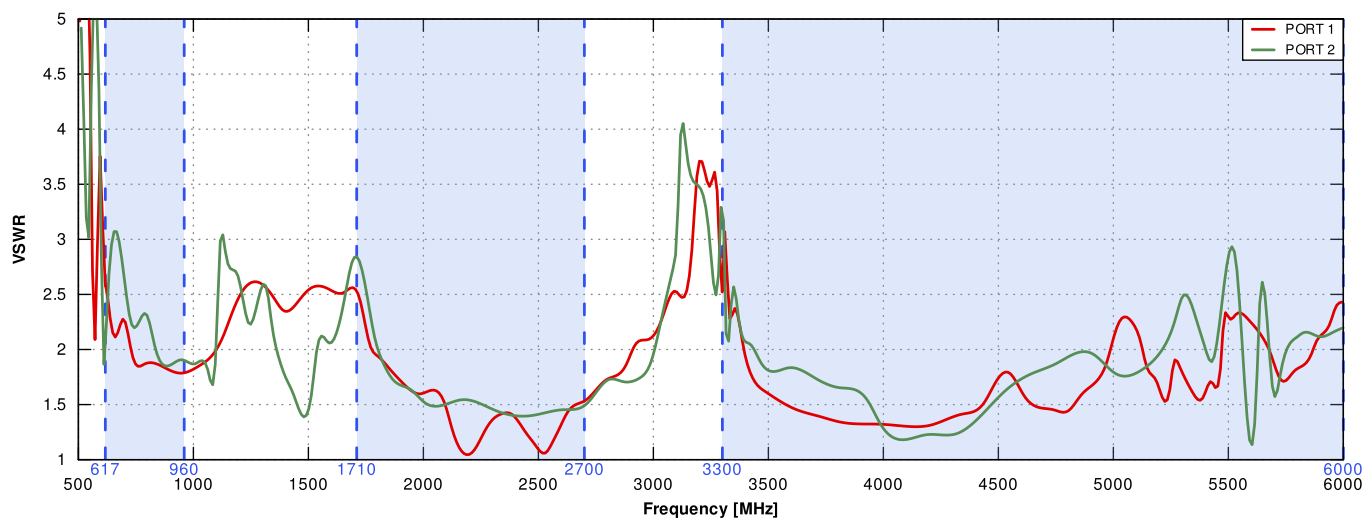



Gain

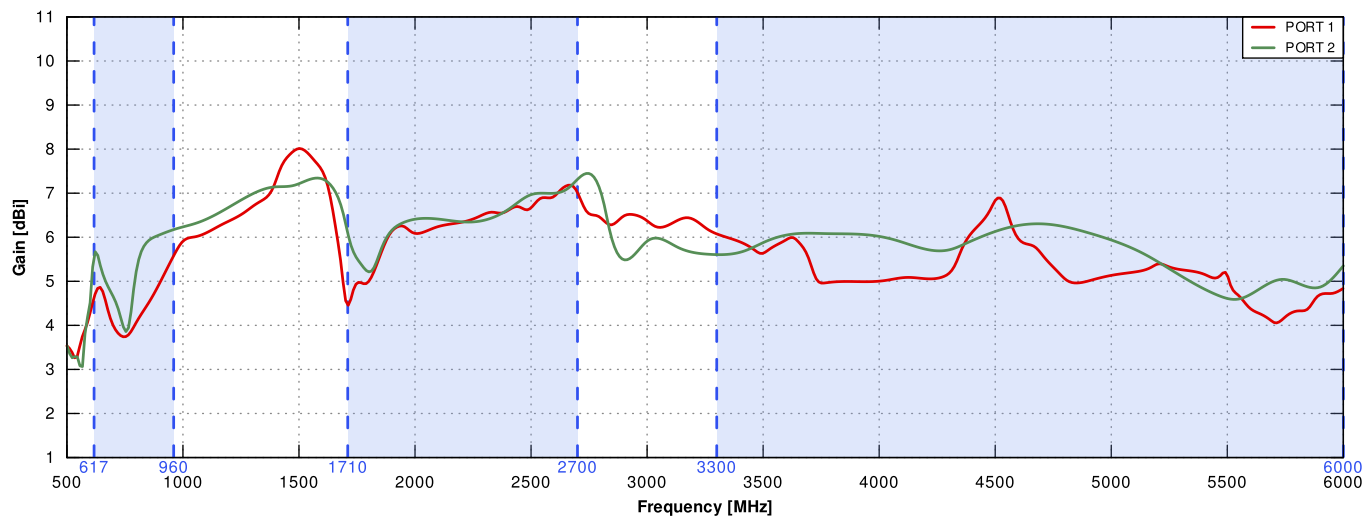



PORT 1 - 5G/LTE from 650MHz to 950MHz

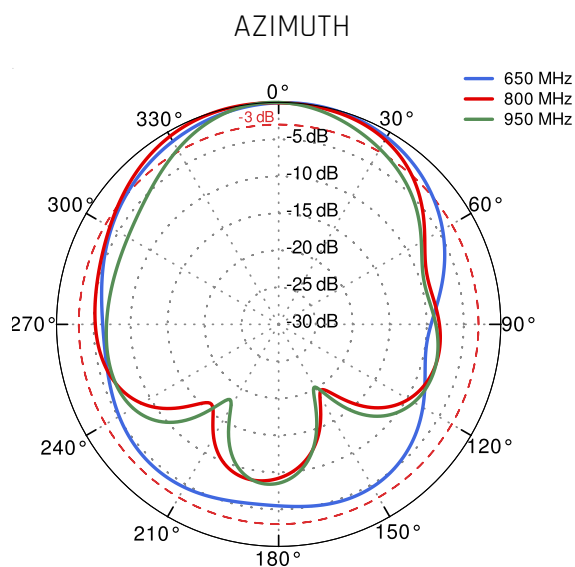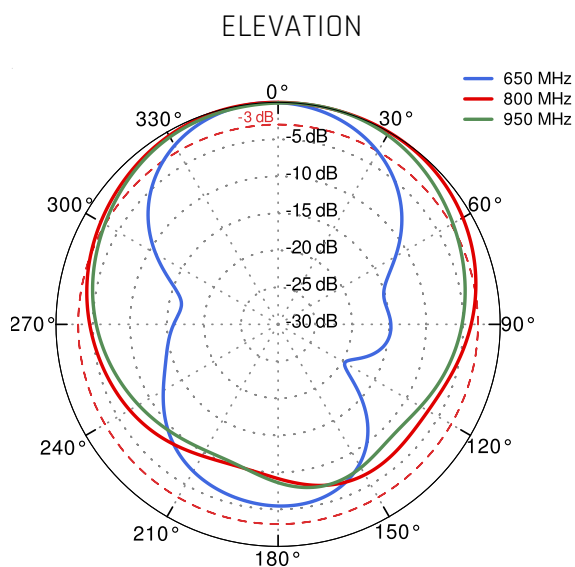


PORT 1 - 5G/LTE from 1.71GHz to 2.17GHz

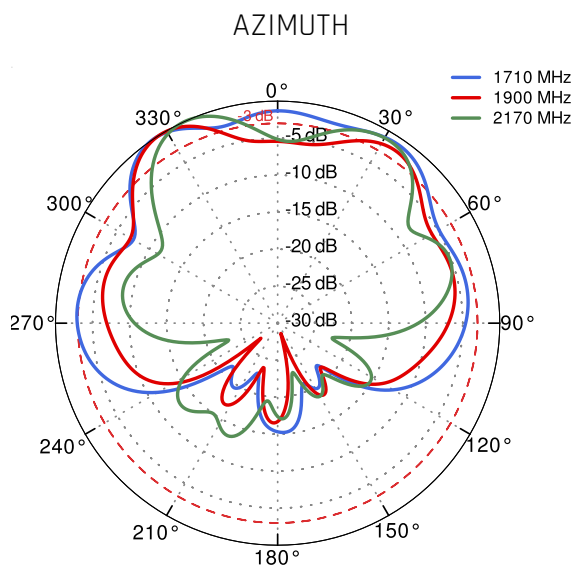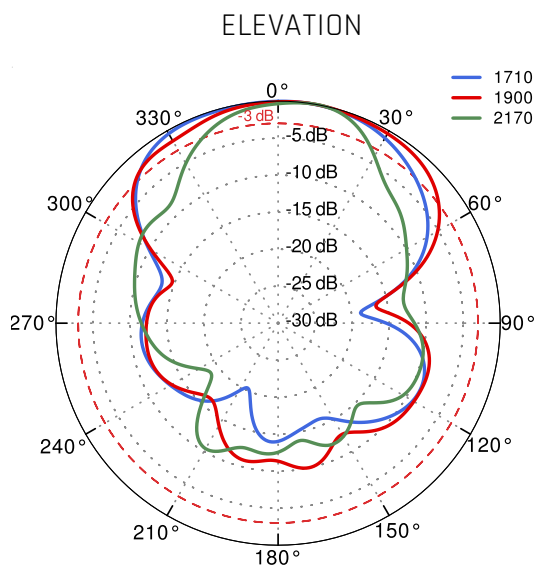


PORT 1 - 5G/LTE from 2.3GHz to 2.7GHz

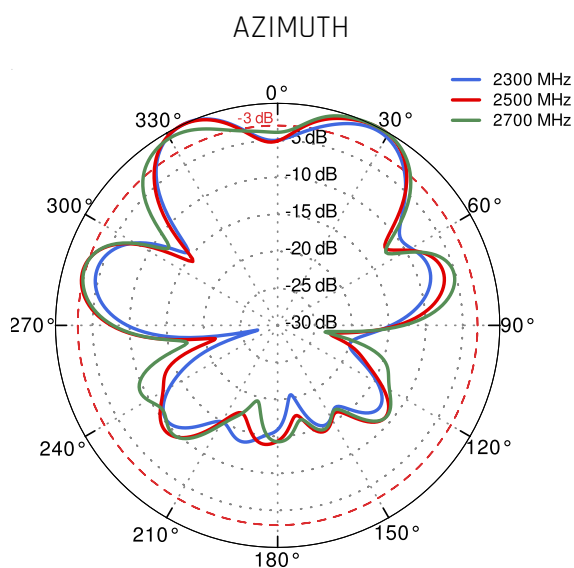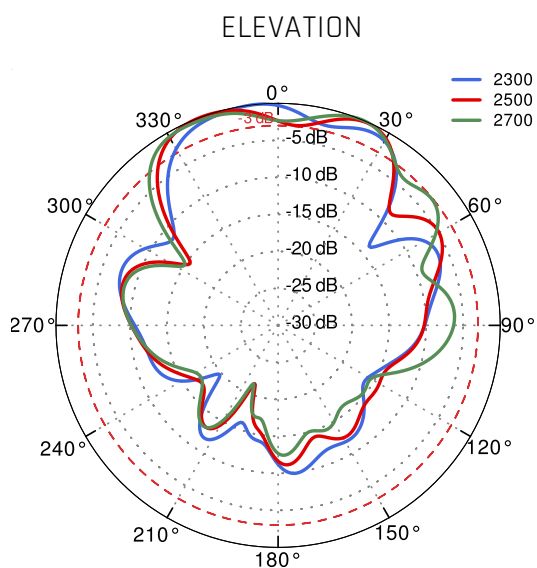


PORT 1 - 5G/LTE from 3.3GHz to 3.8GHz

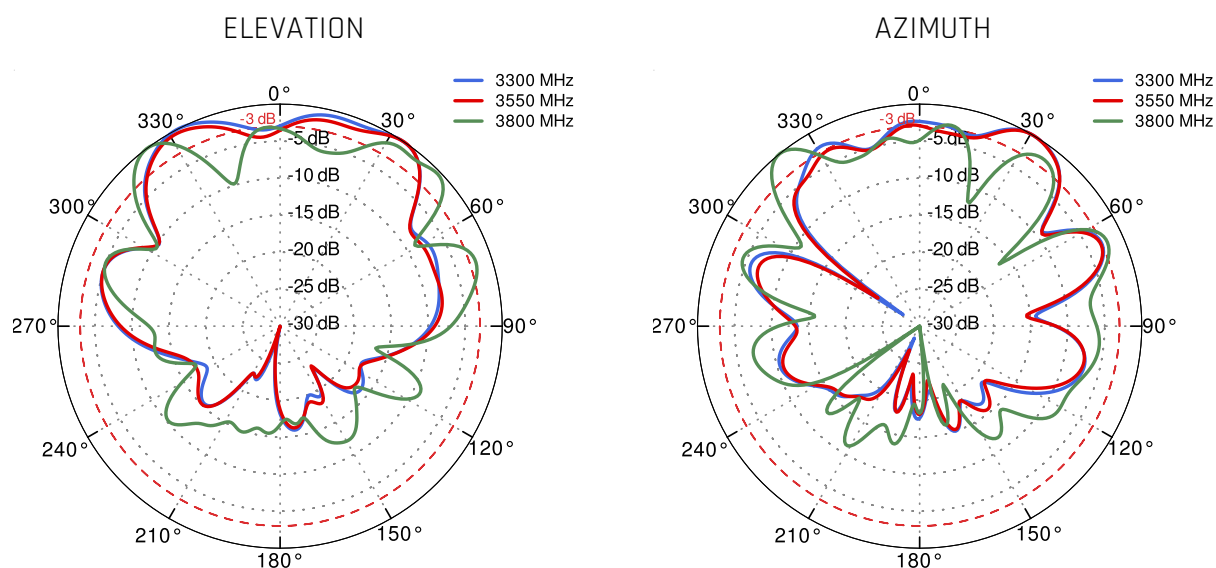


PORT 1 - 5G/LTE from 4.2GHz to 4.6GHz

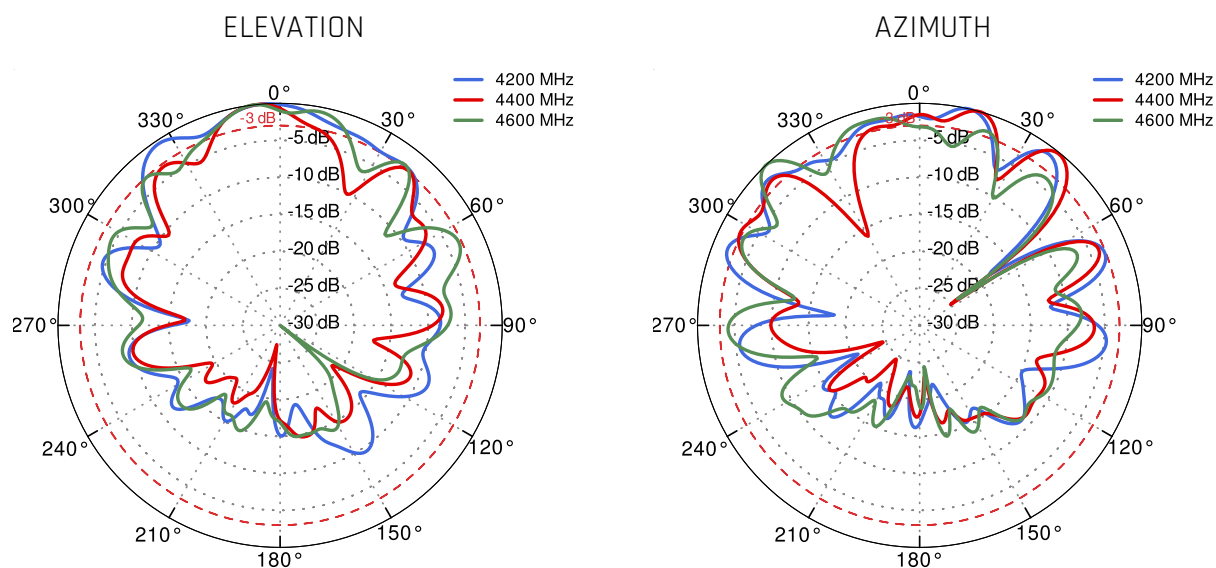


PORT 1 - 5G/LTE from 5.0GHz to 5.9GHz

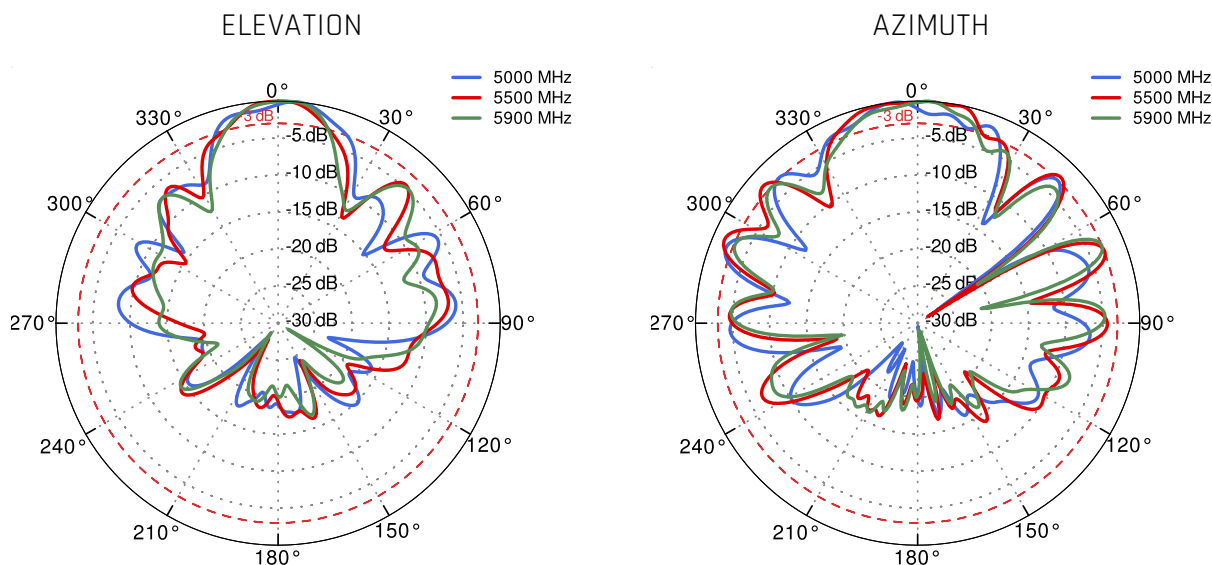


PORT 2 - 5G/LTE from 650MHz to 950MHz

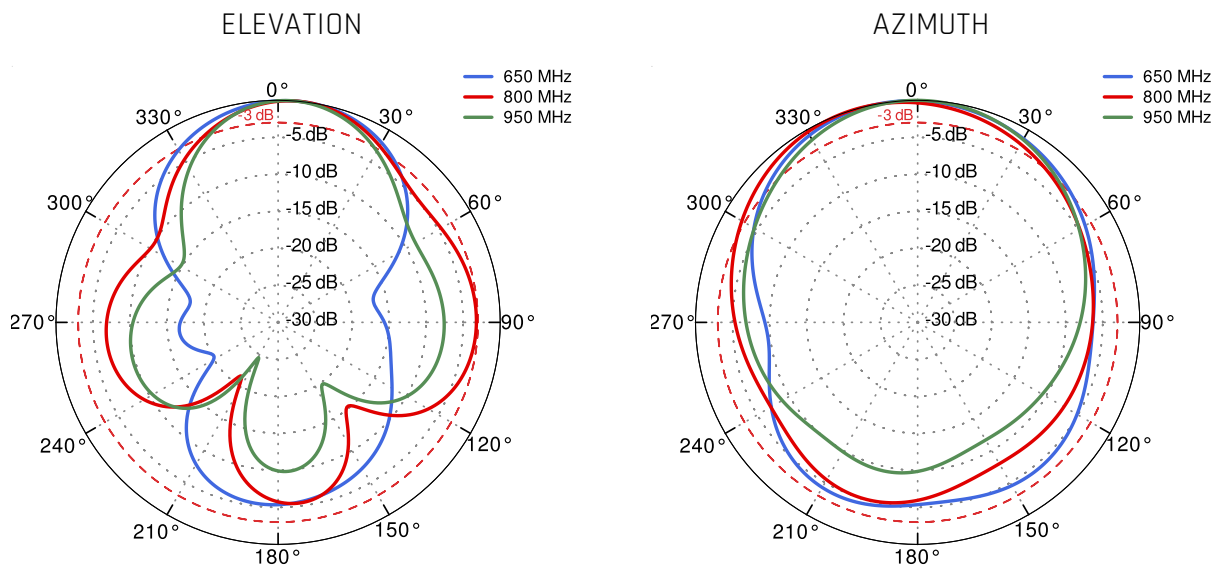



PORT 2 - 5G/LTE from 1.71GHz to 2.17GHz

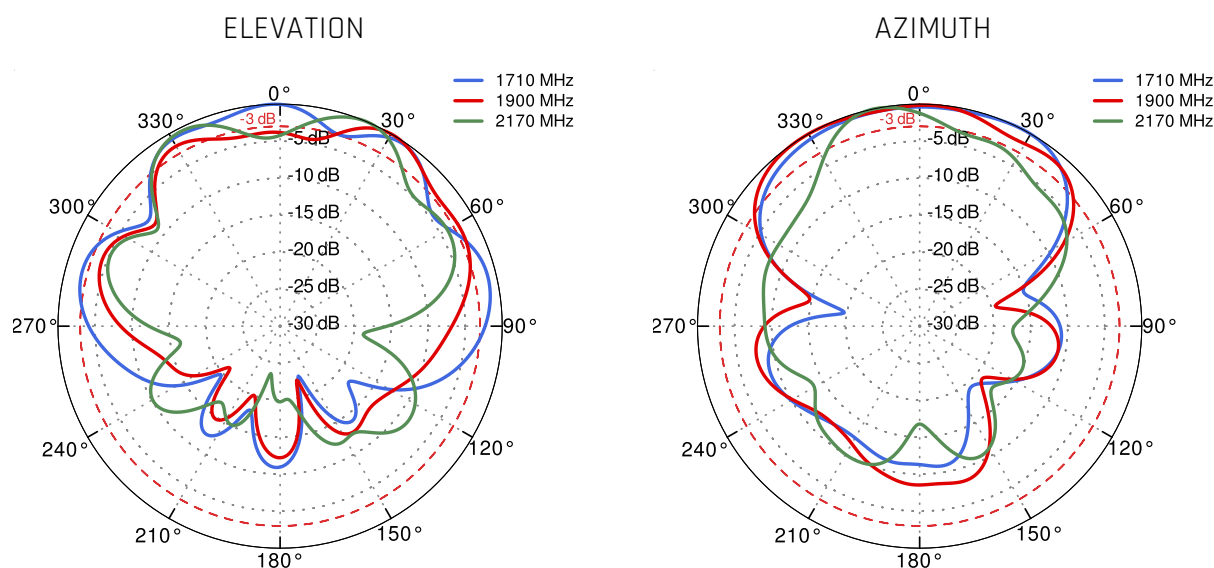



PORT 2 - 5G/LTE from 2.3GHz to 2.7GHz

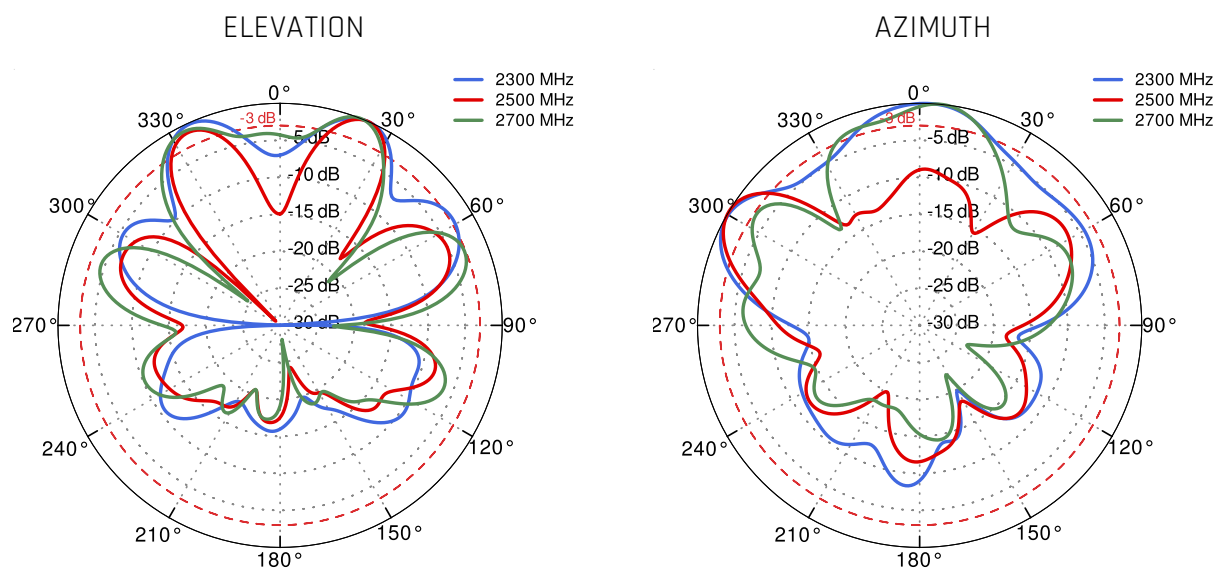



PORT 2 - 5G/LTE from 3.3GHz to 3.8GHz

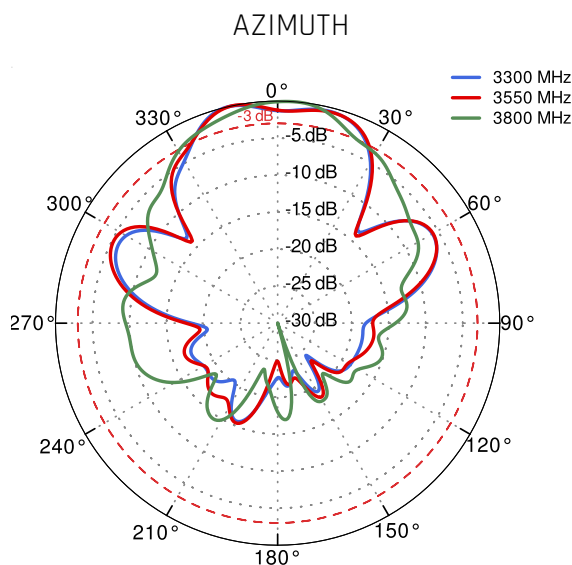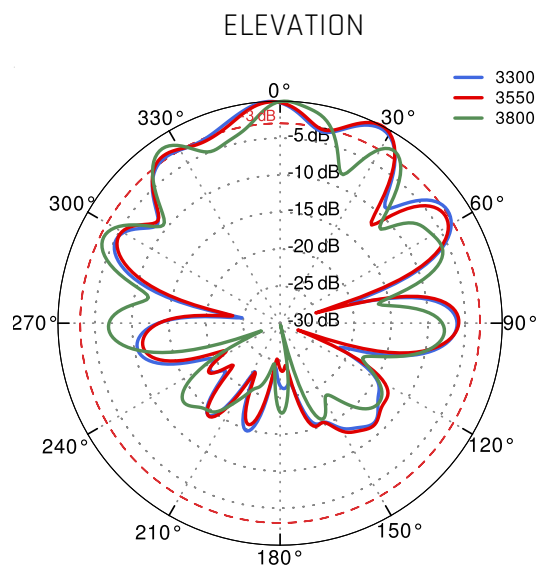

PORT 2 - 5G/LTE from 4.2GHz to 4.6GHz

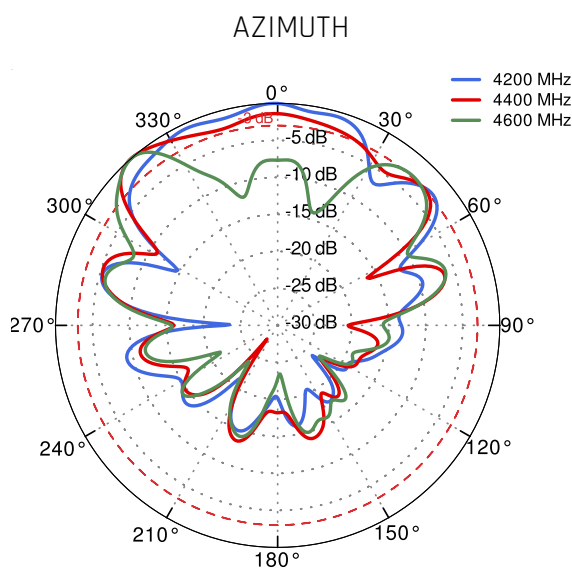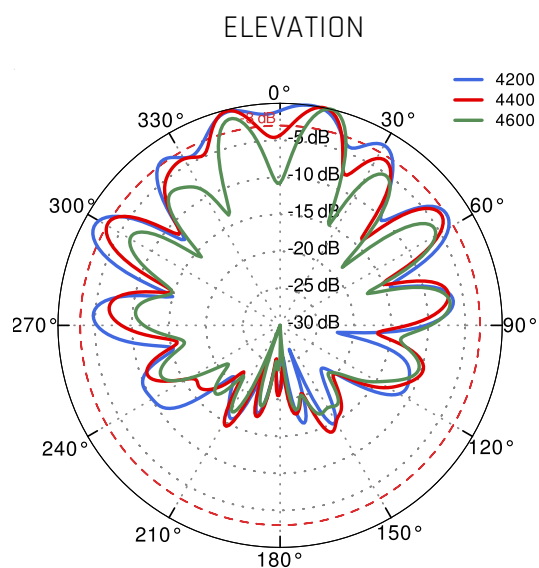

PORT 2 - 5G/LTE from 5.0GHz to 5.9GHz

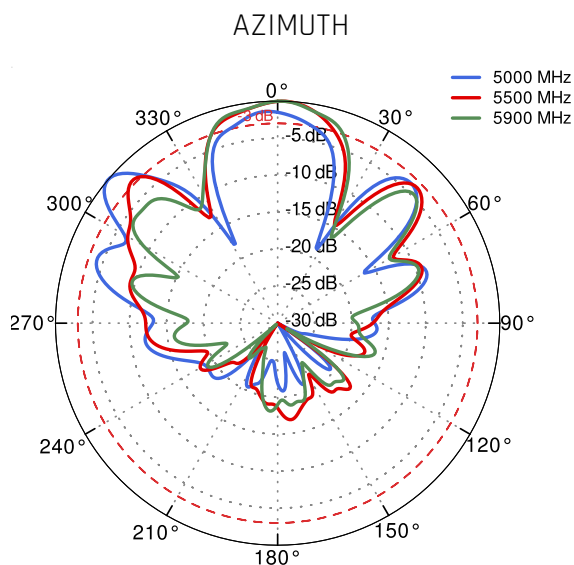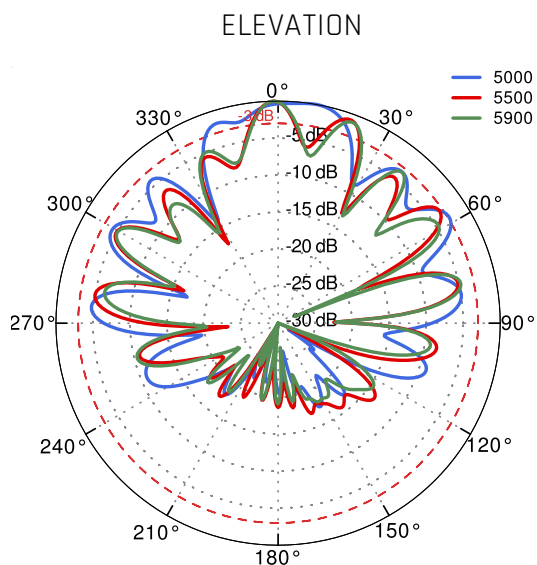

DIMENSIONS

