


QuOmni 5G/LTE Global MIMO 4x4 Nf

Omnidirectional ultra wideband 5G/LTE MIMO 4x4 antenna

QuOmni 5G/LTE omnidirectional MIMO 4x4 is ultra wideband LTE Outdoor antenna. It's primary designed for LTE/5G/3G/2G devices which require high efficiency connections. The antenna covers many LTE bands including the new Extended LTE Band 71, frequencies: **617 - 6000MHz**. The mounting bracket allows the antenna to be installed on the buildings (on the pole or on the wall) as the client antenna or on the moving points like trains, buses, lorries, yachts, boats to receive Internet by LTE/5G/3G/2G. It's ideal solution to use with all industrial and domestic 4x4 LTE modems and routers like: Teltonika, DIGI, Mikrotik, Robustel, Cisco, etc.

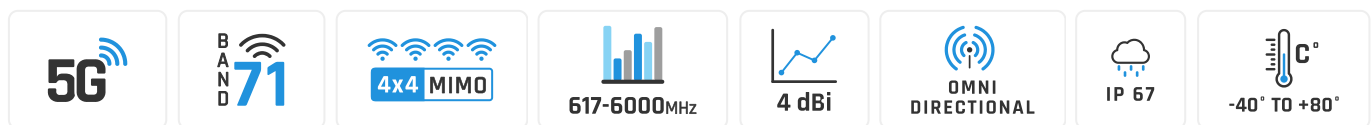

WIDE BAND 600-6000MHZ, 5G TECHNOLOGY



GALVANIZED STEEL, WALL OR POLE MOUNTING BRACKET



FOUR NF CONNECTORS



360° BEAMWIDTH



4.5DBI GAIN



MADE IN EUROPE



5G / LTE ANTENNA SPECIFICATION


FREQUENCY	617 - 960 MHz 1.7 - 2.7 GHz 3.3 - 4.7 GHz 5.2 - 6.0 GHz
GAIN	617 - 960 MHz : 3 dBi 1.7 - 2.2 GHz : 4 dBi 3.3 - 4.7 GHz : 4.5 dBi 5.2 - 6.0 GHz : 2.5dBi
SUPPORTED LTE BANDS	1, 2, 3, 4, 5, 7, 8, 9, 10, 12, 13, 14, 17, 18, 19, 20, 22, 25, 26, 27, 28, 29, 30, 33, 34, 35, 36, 37, 38, 39, 40, 41, 42, 43, 44, 47, 48, 49, 52, 53, 65, 66, 67, 68, 69, 71, 85, 103, 106
SUPPORTED 5G BANDS	n1, n2, n3, n5, n7, n8, n12, n13, n14, n18, n20, n25, n26, n28, n29, n30, n34, n38, n39, n40, n41, n47, n48, n53, n65, n66, n67, n71, n77, n78, n80, n81, n82, n83, n84, n85, n86, n89, n90, n95, n97, n98, n100, n101, n256
VSWR	<1.80, max <2.00
BEAMWIDTH	360°/35° ±5°
POLARIZATION	Vertical
IMPEDANCE	50 Ω

MECHANICAL SPECIFICATION

MATERIALS	ABS, aluminum, PTFE
CONNECTOR TYPE	Nf
INGRESS PROTECTION	IP67
DIMENSIONS	160 x 160 x 240 mm 6.3 x 6.3 x 9.45 inch
WEIGHT	1.5 kg 3.31 lbs
OPERATING TEMPERATURE	From -40°C to 80°C From -40°F to 176°F

FREQUENCY BANDS

LTE / 4G	1	2	3	4	5	7	8	617 MHz	6000 MHz
	9	10	12	13	14	17	18		
	19	20	22	25	26	27	28		
	29	30	33	34	35	36	37		
	38	39	40	41	42	43	44		
	47	48	49	52	53	65	66		
	67	68	69	71	85	103	106		


5G

	n1	n2	n3	n5	n7	n8	n12	
	n13	n14	n18	n20	n25	n26	n28	
	n29	n30	n34	n38	n39	n40	n41	
617 MHz	n47	n48	n53	n65	n66	n67	n71	6000 MHz
	n77	n78	n80	n81	n82	n83	n84	
	n85	n86	n89	n90	n95	n97	n98	
	n100	n101	n256					

COMPATIBLE ROUTERS


VARIANT: AO5G4-GN

TELTONIKA	RUTX12, RUTX14, RUTX50, TRB500
DIGI	TX54 LTE-Advanced
ROBUSTEL	EG5120, R2000, R5020, R5020 Lite
COMSET	CM770W-6
CRADLEPOINT	IBR1700, R1900
DIGI	TX54 LTE-Advanced
EE 5G (5GEE)	Smart 5G Hub
FORTINET	FEX-311F
PEPLINK	BR1 Pro (CAT-20), MAX HD2, MAX HD2 Mini, MAX Transit, MAX Transit Duo Pro, UBR Plus


QUECTEL	5G RM500Q-AE, 5G RM500Q-GL, 5G RM502Q-GL, 5G RM505Q-AE, 5G RM510Q-GL, 5G RM520N-EU, 5G RM520N-GL, 5G RM521F-GL, 5G RM530N-GL, LTE-A EM160R-GL
ROBUSTEL	EG5120, R2000, R5020, R5020 Lite
SIEMENS	6GK5853-2EA00-2DA1, 6GK5856-2EA00-3AA1, 6GK5856-2EA00-3DA1
TELTONIKA	RUTX12, RUTX14, RUTX50, TRB500
ZYXEL	Nebula FWA510, NR5103
OTHER	4 * SMA

PLOTS



VSWR

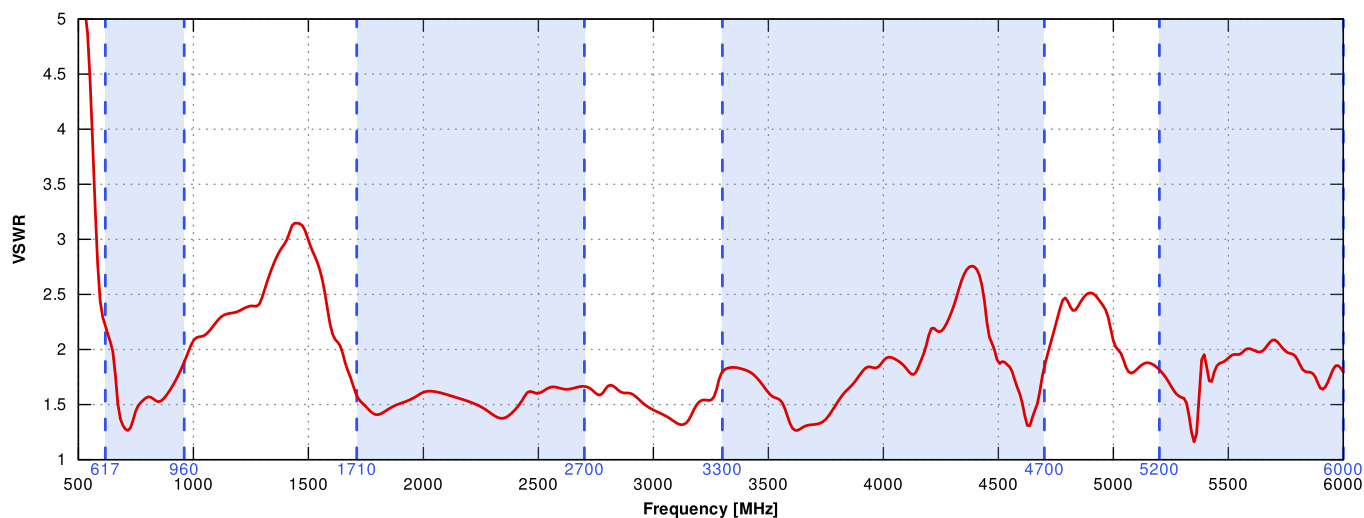


Gain

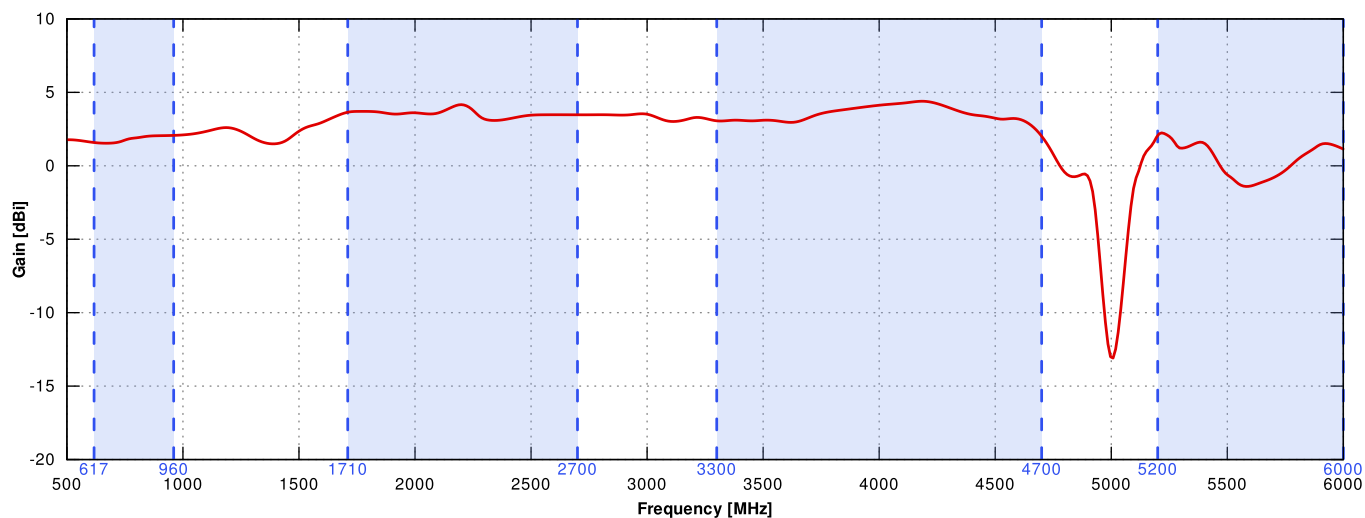


From 617MHz to 960MHz

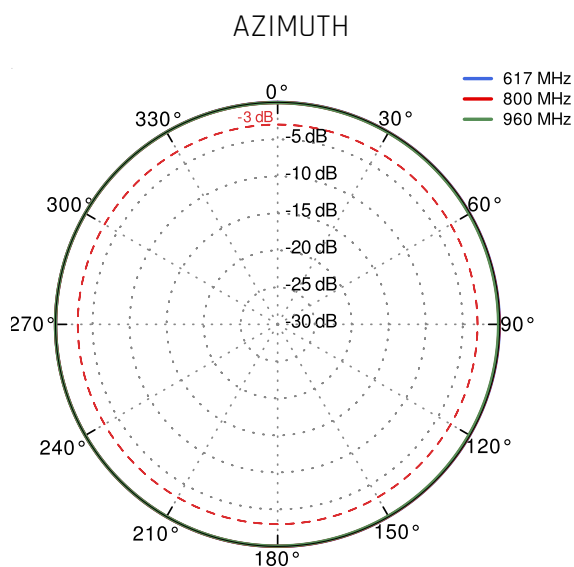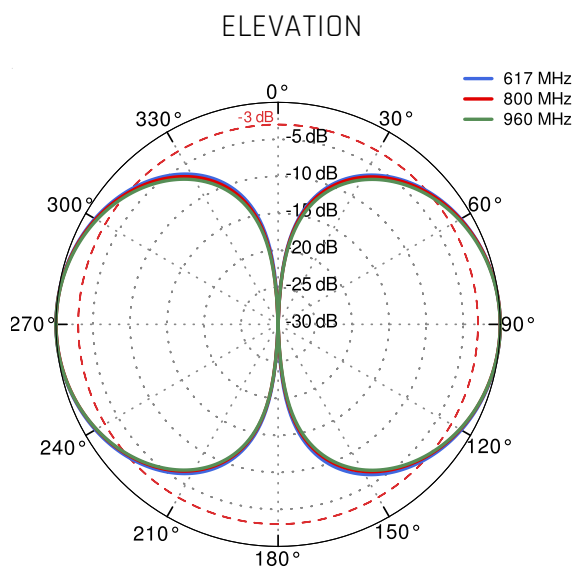


From 1.71GHz to 2.5GHz

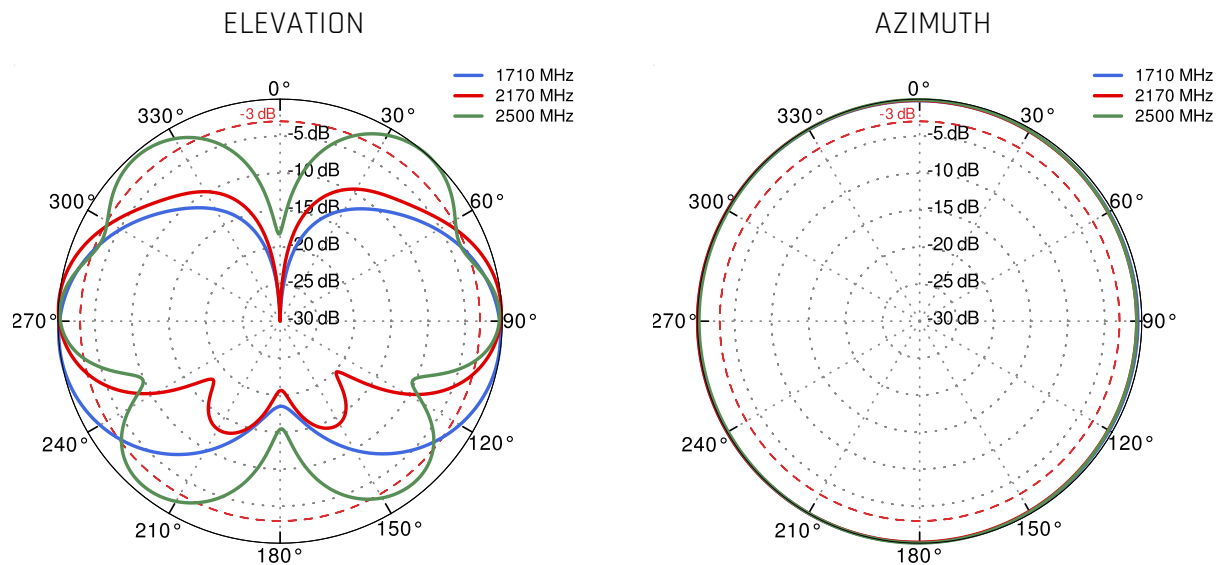

From 3.3GHz to 4.2GHz

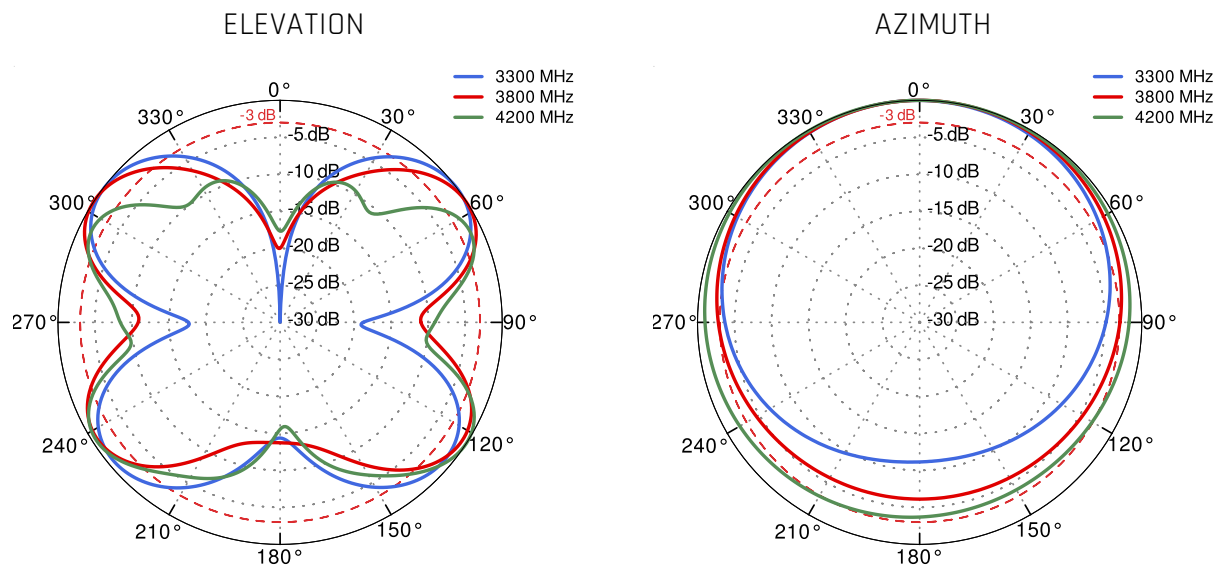

From 4.6GHz to 5.5GHz

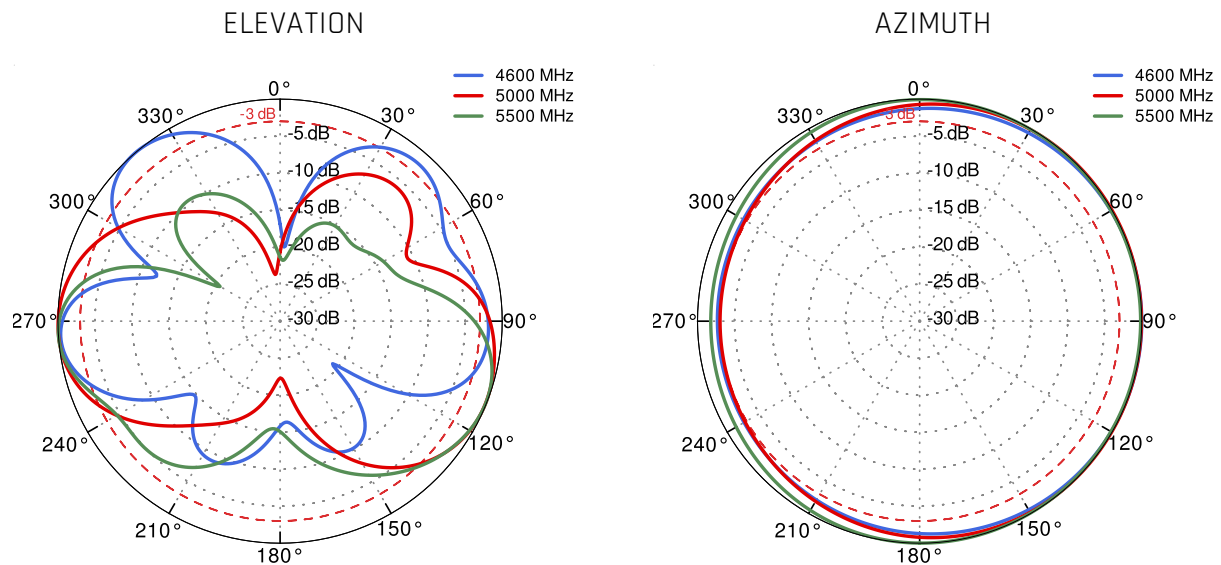

DIMENSIONS

