QuOmni 5G/LTE MIMO 2x2, ver. US Nf

Omnidirectional ultra wideband 5G/LTE MIMO 2x2 antenna

QuOmni 5G/LTE omnidirectional MIMO 2x2 antenna is an ultra wide band outdoor LTE antenna. Its primary purpose is to cater to LTE/5G/3G/2G devices that demand highly efficient connections. This antenna covers a wide range of LTE bands, including the new Extended LTE Band 71, frequencies from 617 MHz to 3800 MHz.
Its versatile mounting bracket allows for installation on a pole or a wall, making it suitable for use as a client antenna. Additionally, it is well-suited for installation on mobile platforms like trains, buses, trucks, yachts, and boats to enable internet reception via LTE/5G/3G/2G.
This antenna serves as an ideal solution for pairing with various industrial and domestic 2x2 5G/LTE modems and routers, including manufacturers such as Teltonika, DIGI, Mikrotik, Robustel, Cisco, and more.

5G | BAND 71 | 2x2 MIMO | 617-3800MHz | 4 dBi | OMNI DIRECTIONAL | IP 67 | -40° TO +80°

- OUTDOOR ANTENNA WORKS IN ANY WEATHER CONDITIONS, IP67
- GALVANIZED STEEL, WALL OR POLE MOUNTING BRACKET
- TWO INTEGRATED NF CONNECTORS
- 360° BEAMWIDTH
- 4DBI GAIN
- MADE IN **EUROPE**

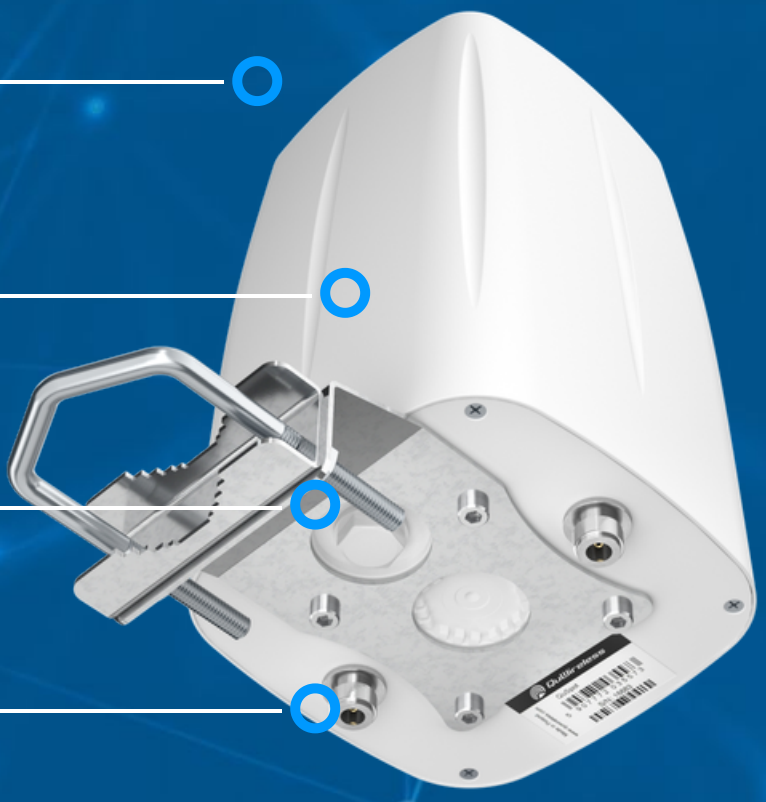

5G / LTE ANTENNA SPECIFICATION

FREQUENCY	617 - 960 MHz 1.7 - 2.2 GHz 2.3 - 2.7 GHz 3.3 - 3.8 GHz
GAIN	617 - 960 MHz : 3 dBi 1.7 - 2.2 GHz : 3.5 dBi 2.3 - 2.7 GHz : 3.5 dBi 3.3 - 3.8 GHz : 4dBi
SUPPORTED LTE BANDS	1, 2, 3, 4, 5, 7, 8, 9, 10, 12, 13, 14, 17, 18, 19, 20, 22, 25, 26, 27, 28, 29, 30, 33, 34, 35, 36, 37, 38, 39, 40, 41, 42, 43, 44, 48, 49, 52, 53, 65, 66, 67, 68, 69, 71, 85, 103, 106
SUPPORTED 5G BANDS	n1, n2, n3, n5, n7, n8, n12, n13, n14, n18, n20, n25, n26, n28, n29, n30, n34, n38, n39, n40, n41, n48, n53, n65, n66, n67, n71, n78, n80, n81, n82, n83, n84, n85, n86, n89, n90, n95, n97, n98, n100, n101, n256
VSWR	<1.80, max <2.00
BEAMWIDTH	360°/35° ±5°
POLARIZATION	Vertical
IMPEDANCE	50 Ω

Copyright © 2023, Wireless Instruments. Specifications and information given in this document are subject to change without prior notice.

MECHANICAL SPECIFICATION

MATERIALS	ABS, aluminum, PTFE
CONNECTOR TYPE	2x integrated Nf
INGRESS PROTECTION	IP67
DIMENSIONS	160 x 160 x 240 mm 6.3 x 6.3 x 9.45 inch
WEIGHT	1.5 kg 3.31 lbs
OPERATING TEMPERATURE	From -40°C to 80°C From -40°F to 176°F

FREQUENCY BANDS

LTE / 4G

617 MHz — 3800 MHz

1	2	3	4	5	7	8
9	10	12	13	14	17	18
19	20	22	25	26	27	28
29	30	33	34	35	36	37
38	39	40	41	42	43	44
48	49	52	53	65	66	67
68	69	71	85	103	106	

Copyright © 2023, Wireless Instruments. Specifications and information given in this document are subject to change without prior notice.

5G	617 MHz	n1 n2 n3 n5 n7 n8 n12 n13 n14 n18 n20 n25 n26 n28 n29 n30 n34 n38 n39 n40 n41 n48 n53 n65 n66 n67 n71 n78 n80 n81 n82 n83 n84 n85 n86 n89 n90 n95 n97 n98 n100 n101 n256

	3800 MHz

COMPATIBLE ROUTERS

VARIANT: A05G2U-N

TELTONIKA	RUT200, RUT230, RUT240, RUT241, RUT260, RUT900, RUT901, RUT950, RUT951, RUT955, RUT956, RUTX09, RUTX11
DIGI	6310-DX, 6330-MX, EX12, EX15, IX10, IX20, WR31, WR44 RR
ROBUSTEL	EG5100, LG5100, R1500, R1510, R1511P, R151x, R1520 Global, R2010, R2011, R201x, R2110, R3000, R3000 Industrial, R3000 LG, R3000 Lite, R3000 Quad, R3010
ANYBUS	Wireless Router WLAN
COMSET	CM210A-W, CM210Q-W, CM510Q-W, CM685T-W, CM685V-1, CM685V-4, CM685V-6, CM685V-6-G, CM820T-W, CM820V-4, CM820V-W
CRADLEPOINT	CBA550, E100, E102, IBR200, IBR600C, IBR900, L950, R500
D-LINK	G415 AX1500, G416 AX1500, N300 4G
DIGI	6310-DX, 6330-MX, EX12, EX15, IX10, IX20, WR31, WR44 RR

Copyright © 2023, Wireless Instruments. Specifications and information given in this document are subject to change without prior notice.

FORTINET	FEX-101F, FEX-201F, FEX-211E, FEX-212F
FOUR-FAITH	4G Cellular Router F-R100, Cellular Wireless Router F-R200, Dual-sim WiFi Router F3946, Industrial WiFi Router F3X36Q, LAN Port Router F3X26 V2, LTE Industrial Router F3X27 V2, LTE Wireless Router F3x36
MIKROTIK	RB912, RB922, RBM11G, RBM33G
MILESIGHT	UR32
PEPLINK	MAX BR1 Classic, MAX BR1 ENT, MAX BR1 M2M, MAX BR1 Mini, MAX BR1 MK2, MAX BR1 Pro, MAX BR1 Slim
PROROUTE	H685 4G Router
QUECTEL	LTE-A EM060K-EA, LTE-A EM060K-GL, LTE-A EM061K-GL, LTE-A EM120K-GL, LTE-A EM120R-GL
ROBUSTEL	EG5100, LG5100, R1500, R1510, R1511P, R151x, R1520 Global, R2010, R2011, R201x, R2110, R3000, R3000 Industrial, R3000 LG, R3000 Lite, R3000 Quad, R3010
SIEMENS	6GK5876-4AA00-2BA2, 6GK5876-4AA00-2DA2, 6GK5876-4AA10-2BA2
SIERRA WIRELESS	AirLink LX40, AirLink LX60, AirLink MP70, AirLink RV50X, AirLink RV55, AirLink RX55
TELTONIKA	RUT200, RUT230, RUT240, RUT241, RUT260, RUT900, RUT901, RUT950, RUT951, RUT955, RUT956, RUTX09, RUTX11
WAVETEL	W2400 LTE , W3600 4G/LTE Dual WAN, W3604 Multi-WAN, W3608 Multi-WAN, W421, W4600, W4600-S2
WLINK	G200, G510, G520, R210, R220, R520
ZYXEL	NR5101
OTHER	2 * SMA, 3 * SMA

Copyright © 2023, Wireless Instruments. Specifications and information given in this document are subject to change without prior notice.

PLOTS

VSWR for LTE antenna

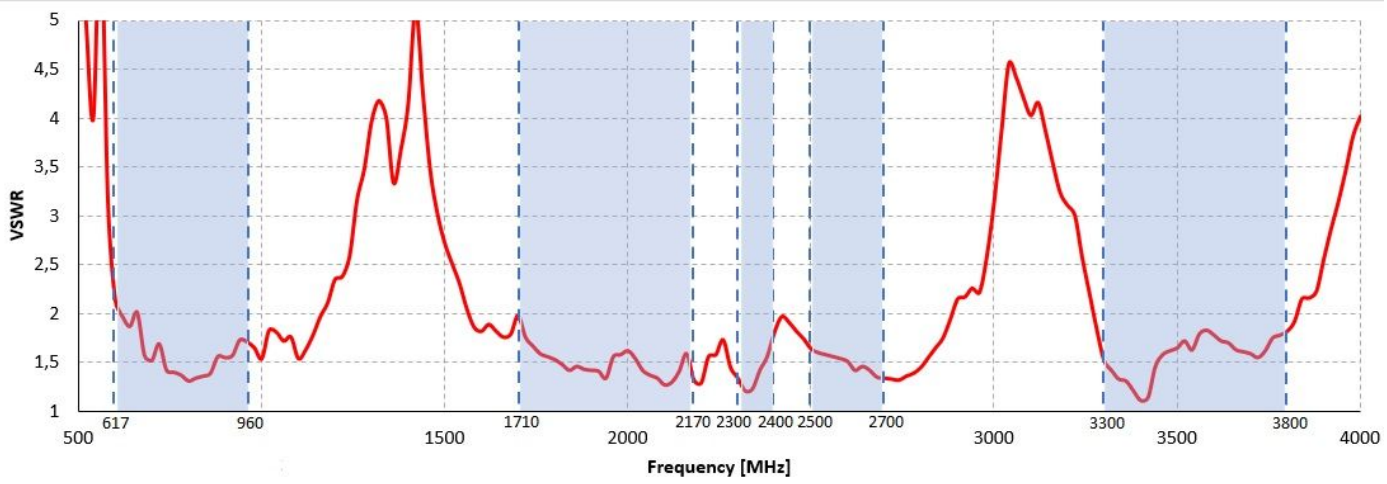

From 650MHz to 950MHz

ELEVATION

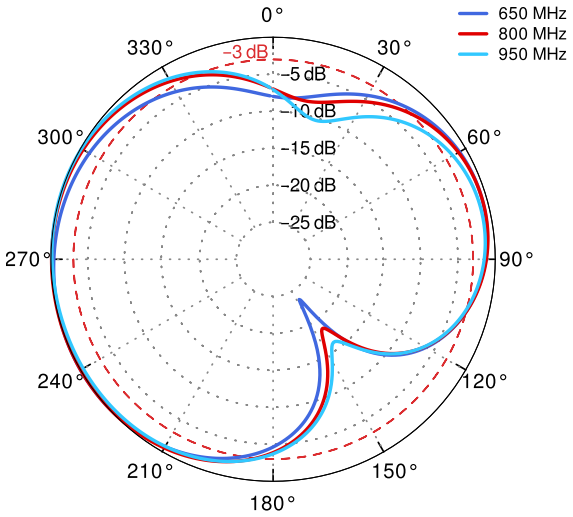

AZIMUTH

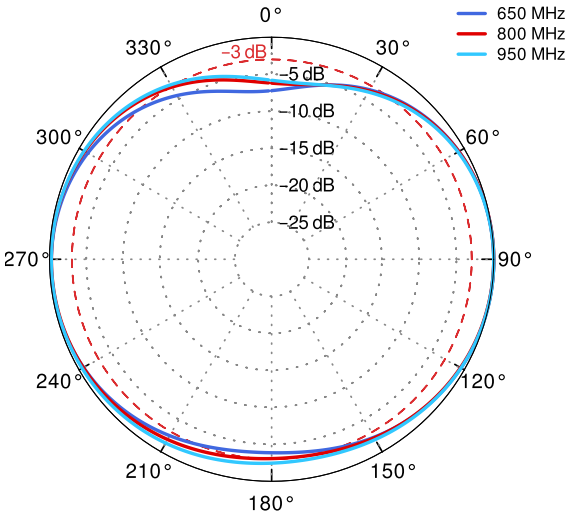

Copyright © 2023, Wireless Instruments. Specifications and information given in this document are subject to change without prior notice.

From 1.71GHz to 2.17GHz

ELEVATION

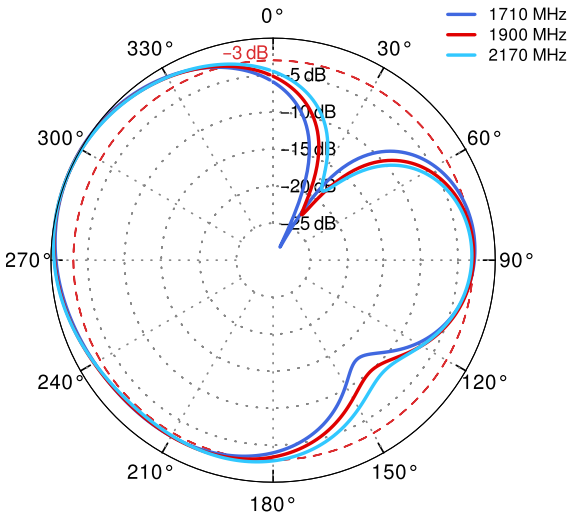

AZIMUTH

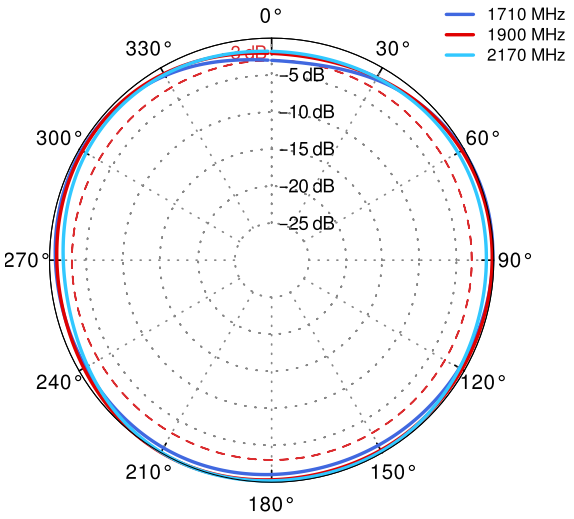

From 2.3GHz to 2.7GHz

ELEVATION

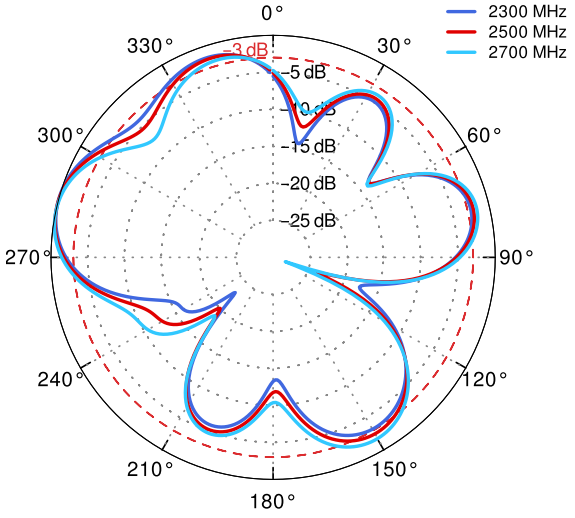

AZIMUTH

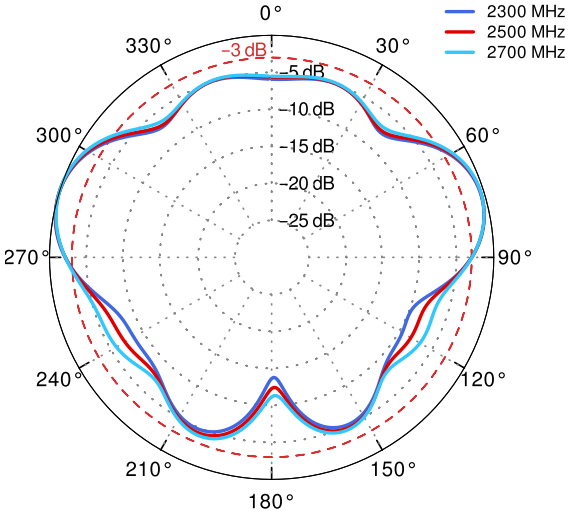

Copyright © 2023, Wireless Instruments. Specifications and information given in this document are subject to change without prior notice.

From 3.3GHz to 3.8GHz

ELEVATION

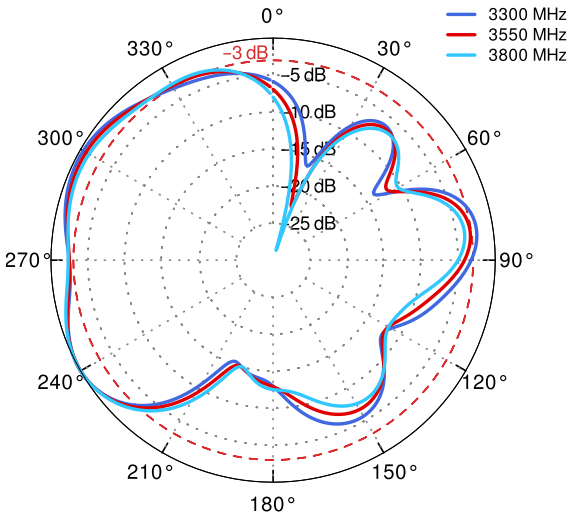

AZIMUTH

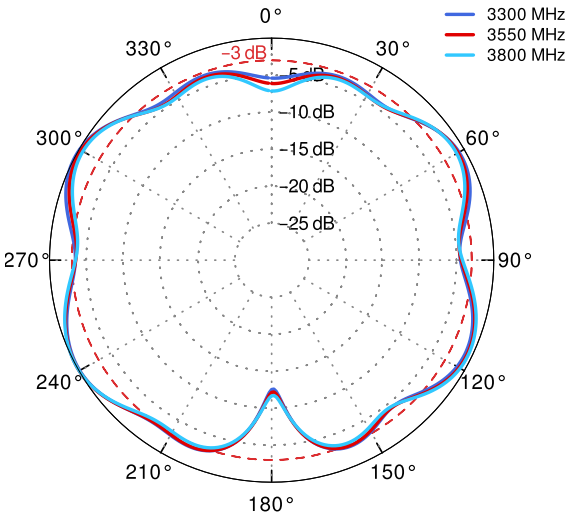

DIMENSIONS

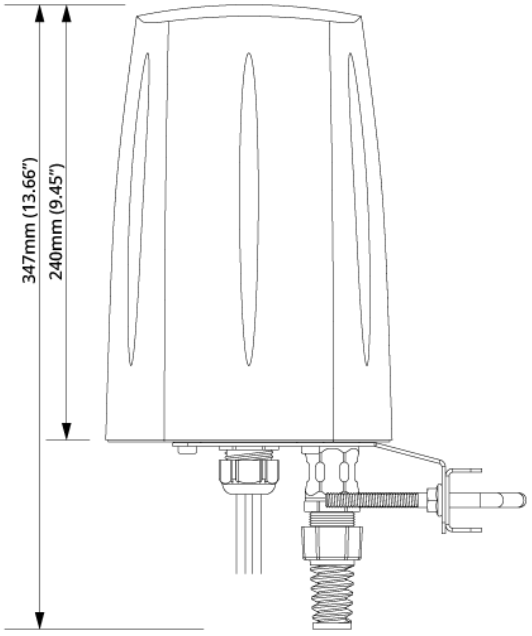

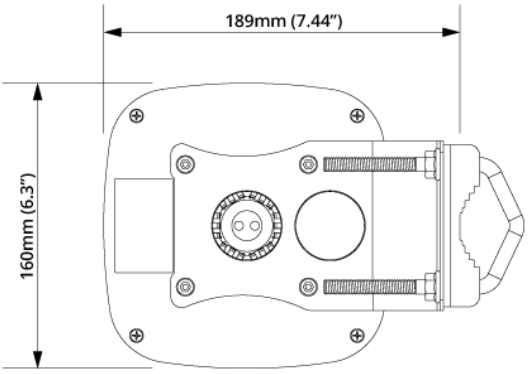

QuWireless WWW.QUWIRELESS.COM

Sales email: sales@quwireless.com **Tel:** +48 513 900 416

Support email: support@quwireless.com **Website:** www.quwireless.com

Address: Wireless Instruments Sp. z o.o., ul. Kościuszki 27, 52-116 Iwiny, Poland

Copyright © 2023, Wireless Instruments. Specifications and information given in this document are subject to change without prior notice.