DIGITUS Industrial Gigabit PoE++ Splitter, 802.3bt

DN-651111
EAN 4016032441182



Industrial Gigabit PoE++ Splitter, 802.3bt selectable power output: 12VDC,16VDC,24VDC,48VDC,

The DIGITUS® Industrial Gigabit PoE Splitter is designed for harsh environments, in which it is exposed to moisture, temperature variations and vibrations. With a temperature range of -40°C to 75°C, the Industrial Gigabit PoE Splitter can be used under the most adverse conditions. It ensures a constant availability in highly sensitive areas such as transport, production, traffic and safety monitoring. The simple plug-and-play system allows a fast integration of the Industrial Gigabit PoE Splitter into the respective environment. The DIGITUS® DN-651111 is an unmanaged Plug & Play Industrial Gigabit PoE Splitter in a rugged IP30 protected aluminum housing. The Gigabit connectivity, as well as the selectable voltage that can be provided for non-PoE compatible devices, make the Industrial Gigabit PoE Splitter a flexible, cost-effective solution for the industrial environment. The supply voltage can be selected in the range of 12VDC, 16VDC, 24VDC or 48VDC. The IEEE802.3bt standard allows PoE feed of up to 95W. Two parallel current outputs are provided for terminal devices.

- Gigabit Splitter with up to 95W PoE feed

- Flexibly adjustable output voltage: 12VDC, 16VDC, 24VDC, 48VDC
- Gigabit data output for network connection
- Backward compatible with IEEE802.3af/at standard
- Store and forward technology for optimized data transfer
- Auto MDI/MDI-X function
- Diagnostic LEDs for status and activity monitoring
- Operating temperature: -40°C to +75°C
- Ethernet speed: Gigabit
- Industrial usage: yes
- PoE (Power over Ethernet): no
- Protection against vanadlism: no
- Managed: no
- Outdoorsuitable: no
- VLAN: no
- Power output: 55 W
- PoE standard: IEEE802.3bt (PoE++)


Package contents

- Industrial Gigabit PoE++ Splitter, 802.3bt
- Quick start guide

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	16	7.00	56.00	35.00	24.00	47,040.00
Packaging Unit Inside	1	0.44	21.50	6.50	16.50	2,305.88
Packaging Unit Single	1	0.44	21.50	6.50	16.50	2,305.88
Net single without Packaging	1	0.15	10.40	3.20	8.20	0.00


More images:



DIGITUS
PoE Standards // IEEE802.3bt
60~95W
30W
15.4W

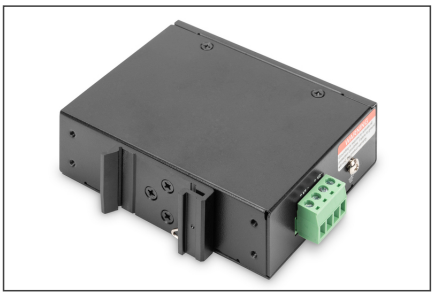




+ V1 -
+ V2 -
WARNING
Grounding is required to activate all protection circuitries. Failure to ground will void the product warranty.

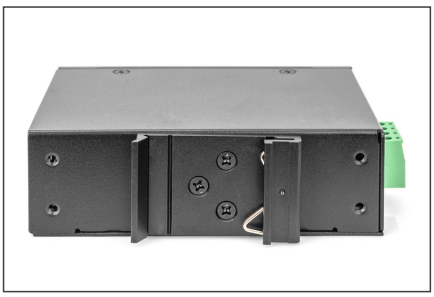

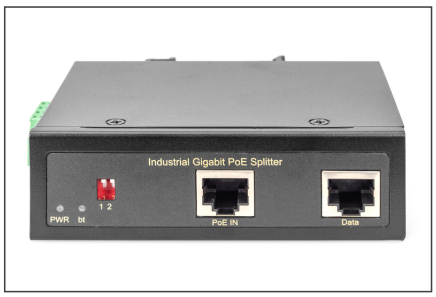
Industrial Gigabit PoE Splitter
PWR
bt
1 2
PoE IN
Data