QuOmni Wi-Fi 6E

QuOmni Wi-Fi 6E offers a 360 degrees, 6dBi (2.4GHz) & 7.5dBi (5GHz and 7GHz) gain signal. It is a perfect indoor and outdoor device for industrial installations.

QuOmni Wi-Fi 6E is a concurrent dual band, Vertical polarity, omni antenna. It simultaneously operates at **2.4GHz** with 6dBi gain and **5GHz+7GHz** with 7.5dBi gain. This antenna is predicted to be installed as the hotspot in parks, stadiums, warehouses, production halls, malls, lecture halls or another public places. Its aesthetic design is acceptable in most of the visible places. Wide frequency range (2.4-2.5GHz & 5.0-7.2GHz) helps to find suitable frequency for the most effective operation. The antenna comes with built-in Nm connector.

Wi Fi 6E | SISO | 2.4GHz + 5GHz | 8 dBi | OMNI DIRECTIONAL | IP 67 | -40° TO +80°

WI-FI SPECIFICATION

FREQUENCY	2.4 - 2.5 GHz 5.0 - 7.2 GHz
GAIN	2.4 - 2.5 GHz: 6dBi 5 GHz: 7.5dBi 7 GHz: 7.5dBi
VSWR	< 1.50, max < 2.00
BEAMWIDTH	360°/25°
POLARIZATION	Vertical
IMPEDANCE	50 Ω
MAX INPUT POWER	50W
DC GROUND	No

MECHANICAL SPECIFICATION

MATERIAL	ABS
CONNECTOR	1xNm
OUTER DIMENSIONS	ø3.0 x 22.0 cm ø1.18 x 8.66 inch
WEIGHT	0.2 kg
OPERATING TEMPERATURE	-40°C to +80°C -40°F to 176°F

Copyright © 2023, Wireless Instruments. Specifications and information given in this document are subject to change without prior notice.

MOUNTING KIT

MOUNTING PLACE	Single Nm connector

COMPATIBLE ROUTERS

VARIANT: OW6E.1NM

ACKSYS	RailTrack, RuggedAir100
ADTRAN	Bluesocket 1940
AEROHIVE NETWORKS	AP1130
ALCATEL-LUCENT	Stellar AP1362
ARISTA	O-105E, O-235E
ARUBA	AP-274, IAP-274
CISCO	AIR-AP1562E, AIR-AP1572EAC, AIR-AP1572EC, AIR-CAP1532E, AIR-CAP1552EU, AIR-CAP1552H, AIR-CAP1552WU, Catalyst 9124AXE, IW3702-2E, IW3702-4E, IW6300, IW9167E, MR74, MR76, MR84, MR86
D-LINK	DWL-8710AP
ENGENIUS	EWS860AP, EWS871AP
EXTREME NETWORKS	AP 360E, AP 3865E, AP 3917, AP 3965E, AP 7562, AP 8163
FORTINET	FAP-222C, FAP-S322C, FAP-S322CR, FAP-S422E, FAP-U422EV, OAP832E
HUAWEI	AP6510DN-AGN, AP6610DN-AGN, AP6760R-51E, AP8130DN, AP8130DN-W, AP8150DN, AP8182DN, AP8760R-X1E
MIST	AP63E

Copyright © 2023, Wireless Instruments. Specifications and information given in this document are subject to change without prior notice.

RUCKUS	T350SE, T750SE
SIEMENS	6GK5748-1GD00-0AB0, 6GK5766-1GE00-7DB0, 6GK5788-1GY01-0AA0, 6GK5788-2GY01-0AA0, 6GK5748-1GD00-0AA0, 6GK5748-1GY01-0AA0, 6GK5766-1GE00-3DA0, 6GK5766-1GE00-3DB0, 6GK5766-1GE00-7DA0, 6GK5766-1GE00-7TA0, 6GK5766-1GE00-7TB0, 6GK5788-1GD00-0AA0, 6GK5788-1GD00-0AB0, 6GK5788-2GD00-0AA0, 6GK5788-2GD00-0AB0, 6GK5788-2GD00-0TA0, 6GK5788-2GD00-0TB0, 6GK5788-2GY01-0TA0, Scalance W738 M12, Scalance W778-1 M12, Scalance W778-1 M12 EEC
XIRRUS	XH2-120, XH2-240
ZYXEL	WAX655E (AX5400)
OTHER	2 * N-male, 3 * N-male, 4 * N-male

PLOTS

VSWR

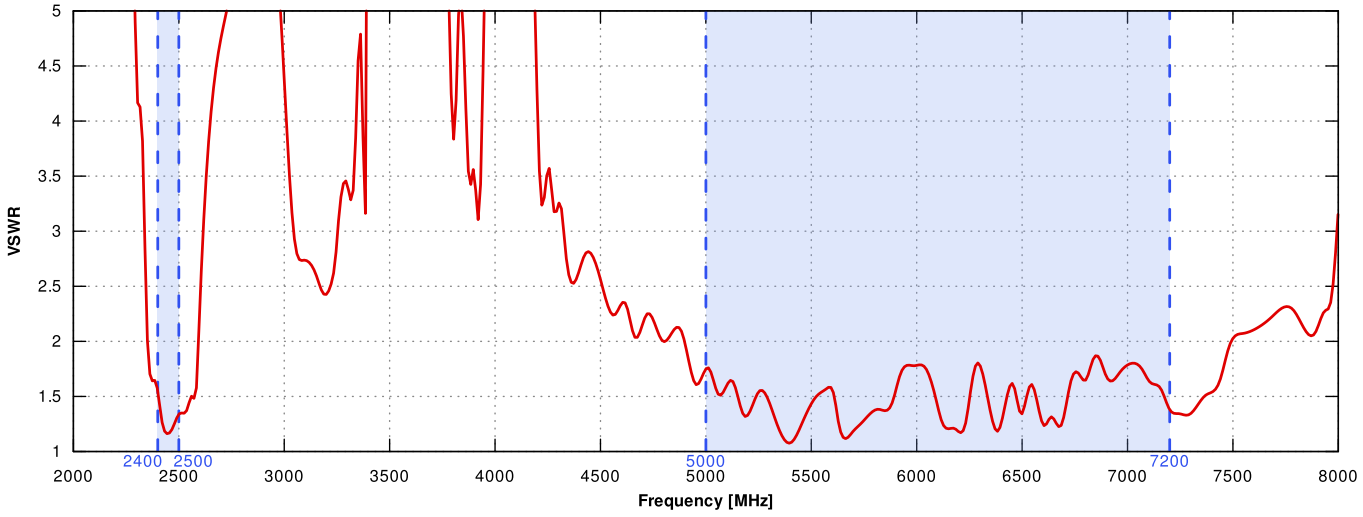

Copyright © 2023, Wireless Instruments. Specifications and information given in this document are subject to change without prior notice.

Gain

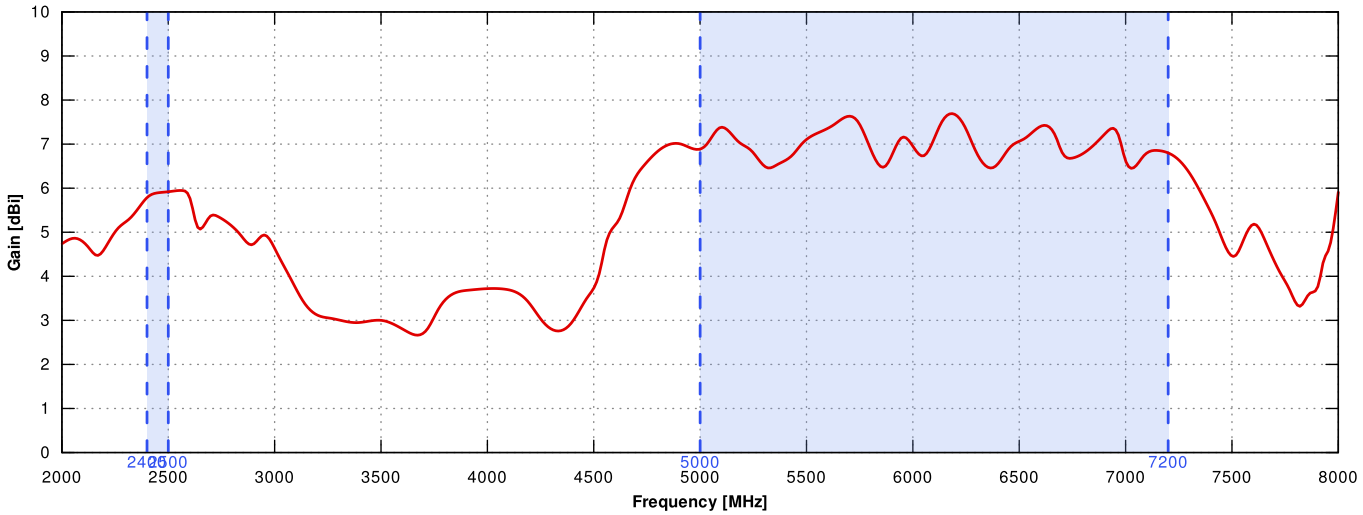

2.4GHz | 5GHz | 6GHz

ELEVATION

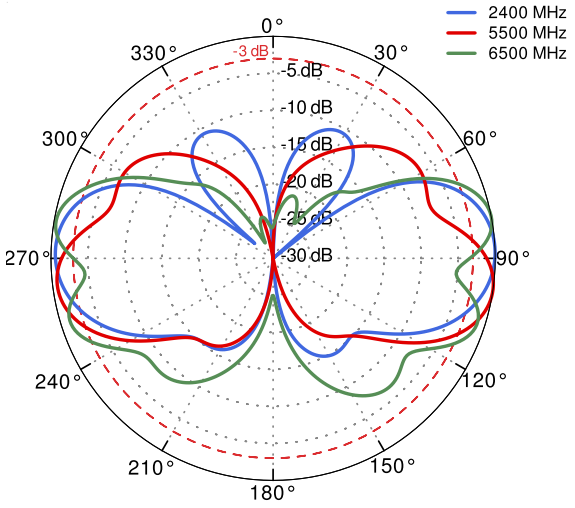

AZIMUTH

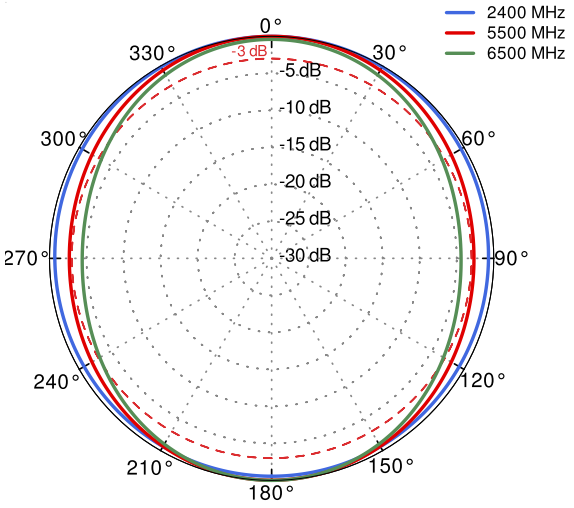

Copyright © 2023, Wireless Instruments. Specifications and information given in this document are subject to change without prior notice.

DIMENSIONS

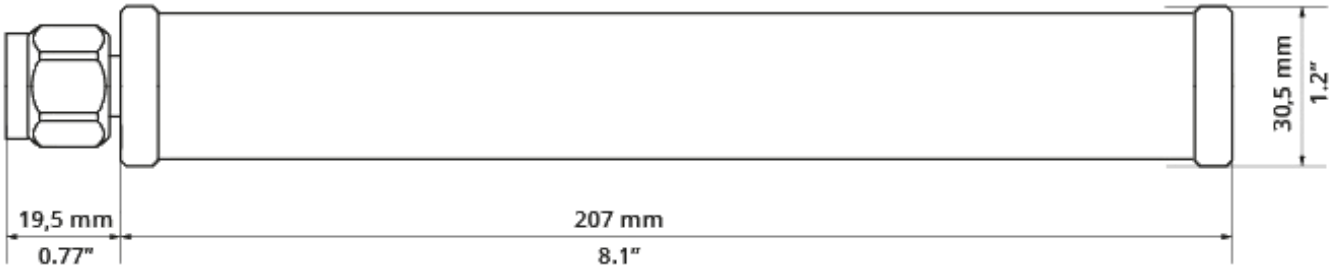

WWW.QUWIRELESS.COM

Sales email: sales@quwireless.com **Tel:** +48 513 900 416

Support email: support@quwireless.com **Website:** www.quwireless.com

Address: Wireless Instruments Sp. z o.o., ul. Kościuszki 27, 52-116 Iwiny, Poland

Copyright © 2023, Wireless Instruments. Specifications and information given in this document are subject to change without prior notice.